

BALIZA NOVA S ^{Led::}

PLUS



BALIZA NOVA S PLUS
EXTERIOR

Led::

BALIZA NOVA S PLUS

Technical characteristics

Triangular bollard with curved sides made up of slats joined together, protecting the optical group from vandalism.

Ideal for lighting paths in residential areas, pedestrian areas.

Light point 90 cm high.

Characteristic dimensions: Ø240 x 900 mm.

Maximum power 40W /

Body in cast aluminum (E N1706 43000) Fixing with Ø173 mm base bolts.

Access to the equipment through the front cover, fixed to the body with M6 captive screws

Approx. weight: 9Kg.

IP65 / IK09

Transparent or glazed injected polycarbonate diffuser in the shape of a bowl.

Includes 2 modules with 9 high efficiency Leds. Check other options.

Includes heat sink plate.

Color temperature: 3000°K or 4000°K. Optionally for areas with environmental protection: amber filter, 2200°K or 2700°K.

FHS < 0.1%.

Minimum CRI 70.


Useful life: L90B10 > 100,000 h (consult depending on the type of LED and configuration).

AC voltage 220V-240V ~ 50/60Hz. Class I / Class II optional.

Color Brown Sand M2. Other colors available.

Standards: IEC 60598, IEC 62031, IEC 62471, IEC 60529, EN 55015, IEC 61000, IEC 61547, IEC 62493, IEC 62471, IEC 61437, IEC 62384, EN 50102, CE, ISO9001, ISO14001, ISO45001.

BALIZA NOVA S PLUS

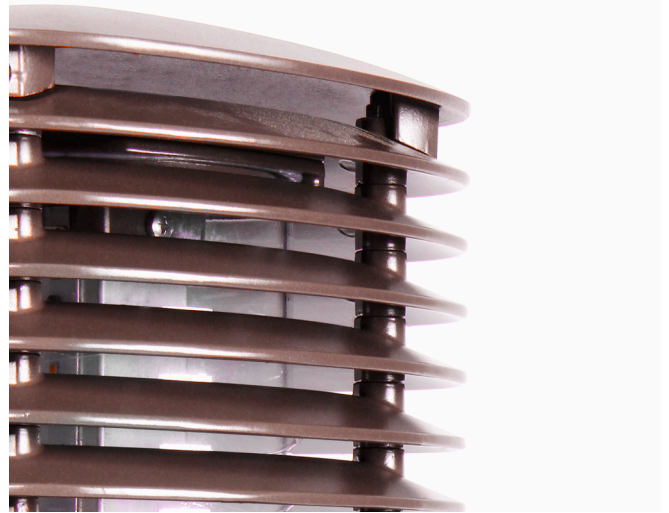

Versions

PCB	3000K				4000K	
	mA	W	lm	lm/W	lm	lm/W
18X	350	19	3060	161	3240	170
	500	27	4320	160	4500	166
	700	38	5760	151	5940	156

